
OUR PRODUCTS RANGE



CNC EDM NEXT GEN V1.1 (Pg. No. 03)



HIGH PRECISION MIRROR CNC EDM
AUTOMATIC LIFTING OIL TANK (Pg. No. 04)



CNC EDM (Pg. No. 05)



CNC EDM (Pg. No. 06)



ZNC EDM DC SERVO (Pg. No. 07)



ZNC EDM AC SERVO (Pg. No. 08)



DRILL EDM NEXT GEN (Pg. No. 09)



CNC DRILL EDM (Pg. No. 10)



WIRE CUT EDM STEPPER (Pg. No. 11)



WIRE CUT EDM SERVO (Pg. No. 12)



MOULD LASER WELDING (Pg. No. 13)



LASER MARKING/ENGRAVING
MICRO TIG WELDINNG (Pg. No. 14)



CNC ENGRAVING (Pg. No. 15 & 16)



CNC ENGRAVING (Pg. No. 15 & 16)



CNC WOOD ROUTER (Pg. No. 17)



CUTTER GRINDER'S (Pg. No. 18)



DIGITAL READOUT (Pg. No. 19)




CONSUMABLES/SPARES (Pg. No. 20)



VERTICAL TURRET MILLING (Pg. No. 21)



HYDRAULIC SURFACE GRINDER (Pg. No. 22)

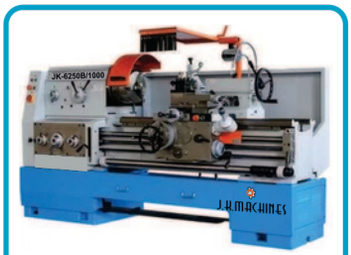

ALL GEARED LATHE (Pg. No. 23)



RADIAL DRILL MACHINE (Pg. No. 24)



VERTICAL MOULDING (Pg. No. 25)



ELECTRICAL SCOOTY (Pg. No. 26)

CNC DRILL EDM



Salient Features

- Ball screw for X & Y & Z axis
- X & Y & Z axis move to coordinate automatically as per program
- L. M. guide for X, Y, Z axis
- Adjustable high pressure compact water pump
- Programming for multi hole pattern, rectangular and circular array
- Programming for multi diameters and technologies
- Touching cycles – edge find, inside / outside center find, corner find
- Machine simulation- Tool path simulation
- USB Ports
- Program/data storage capacity
- Parameter changing is allowable during operation
- Job material steel/copper/brass/aluminium/carbide
- Motorized work head movement
- Electrode dressing facility
- Job holding fixture & clamp
- Tap water is used as dielectric fluid
- Precise granite table
- Compact footprint
- Brass & copper electrodes can be used
- Machine lamp
- Automatic lubrication pump
- Windows base software

Standard Accessories

- Leveling Pads : 4 Nos.
- Clamping Kit : 1 Set
- Tool Kit : 1 Set
- Water Tank : 1No
- Guides : 3Nos.
- Electrodes : 30 Nos.
- Rubber Seal : 5 Nos

UPS 3KVA : 1 No


Application

- Start hole for wire cut edm
- Gas discharge
- Ejector pins
- Cooling pins
- Air vent for forging die
- Jet hole
- Filter hole
- Remove broken tap

Water Pump



Drill Head



Swivel Head



Technical Specification	Unit	CNC-4030
Dimension of working table (X x Y)	mm	400 x 600
Travel of working table (X x Y)	mm	300 x 400
Z axis travel (Z + W)	mm	350 + 300
Distance from quill to table	mm	50 - 350
Max. machining current	amp	30
Drilling range	mm	0.15 - 3.00
Max. electrode length	mm	500
Max. workpiece weight	kg	200
Max. machining speed	mm/min	30 - 60
Max. power consumption	kVA	3.5
Drive system for X, Y, Z axis		Servo Motor
Input power supply	V	3 Phase, 415V , 50Hz
Machine dimension	mm	1200 x 1000 x 2170
Machine weight	kg	800

Note: The photo shown in catalogue is just for reference , can vary according to your requirement.

Corporate Office cum Showroom :
C-46, Mangolpuri Industrial Area,
Phase-I, New Delhi-110083 (India)

7529999900 / 9311003936
www.jkmachines.in
www.jkmachines.co.in
www.jkmachines.net.in
jk.machines@hotmail.com

J.K. MACHINES

HIGH PRECISION INDUSTRIAL MACHINERY

FACEBOOK

INSTAGRAM

WHATSAPP

YOUTUBE